




● **FEATURES 特性**

1. Excellent ferrite magnetic shielding, low distributed capacitance;
2. Semienclosed magnetic circuit design reduces leakage flux and EMI.
3. High standard design, meet AEC-Q200 reliability standard;
4. Operating Temp. : -40°C ~ +125°C (Including self-heating).


● **APPLICATIONS 用途**

1. PoE power supply, DC - DC converter;
2. XDSL communication signal transmission.
3. We can customize products according to your requirements. Please consult our sales.

● **PART NUMBERING SYSTEM 品名系统**

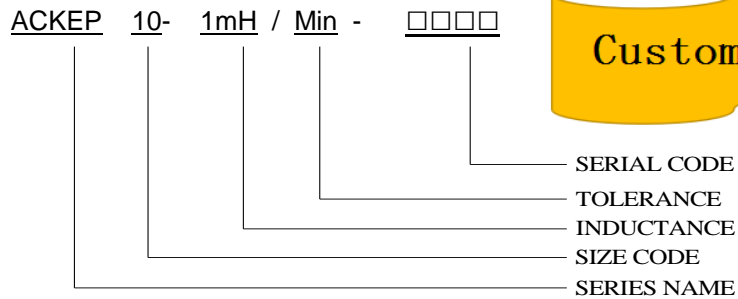

● **SHAPES AND DIMENSIONS 外形尺寸 (Unit:mm)**

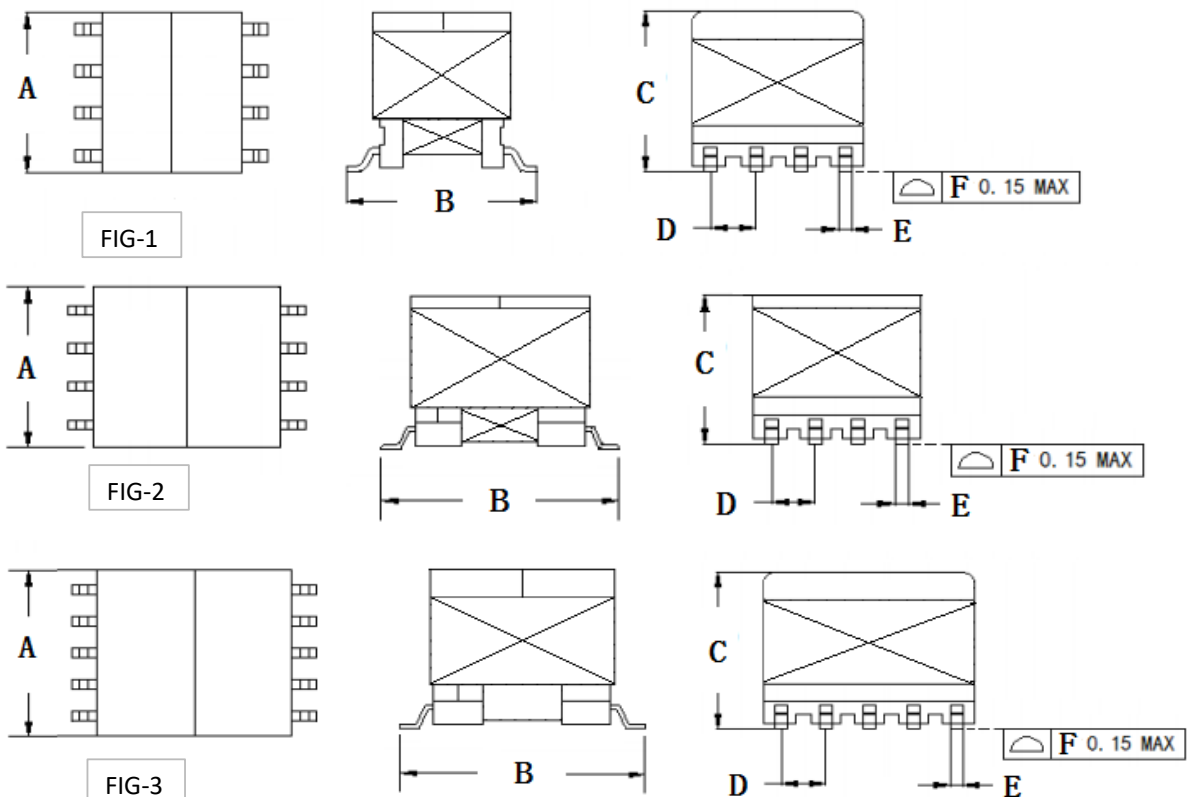

TYPE(型号)	A	B	C	D	E	F	FIG
ACKEP7	10.0Max	10.0Max	11.0Max	2.5±0.3	0.7 REF	0.15 MAX	FIG-1
ACKEP10	12.0Max	15.5Max	11.5Max	2.5±0.3	0.7 REF	0.15 MAX	FIG-2
ACKEP13	13.5Max	17.8Max	12.3Max	2.5±0.3	0.7 REF	0.15 MAX	FIG-3